



ACTIVE POWER (WATT) TRANSDUCER

**S3-WD
SERIES**

FEATURES


- Accuracy: $\pm 0.2\%$ RO.
- Excellent long term stability (4 ~ 20mA, 500 Ω)
- Precision measurement even for unbalance system
- Precision measurement even for distorted wave
- Measuring reverse watt is available
- High impulse & surge protection (5KV)
- The case can be mounted on a 35mm rail which complies with DIN 46277




DESCRIPTION

- Model:** S3-WD-1 1 φ 2W, active power (WATT)
 S3-WD-3 3 φ 3W, active power (WATT)
 S3-WD-3A 3 φ 4W, active power (WATT)

A wide range of transducers to measure all forms of active power, in both balanced and unbalanced, single or 3 phase system. They utilize the well prove "time division multiplication" method of measuring instantaneous power over a wide range of input waveforms. The circuit diagram shown measured voltage is modulated by circuit of an oscillator. Square wave pulses from a multi-vibrator circuit, with a mark - space ratio varied by the measured voltage and amplitude by the measured current, are fed to an integrator an output amplification circuit. The dc signal produced is then directly proportional to power input - Watts.

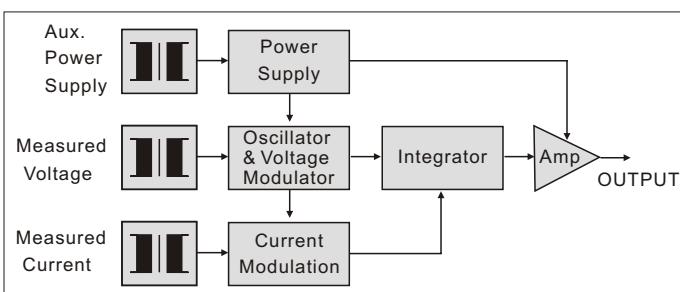

• INPUT - OUTPUT CURVE

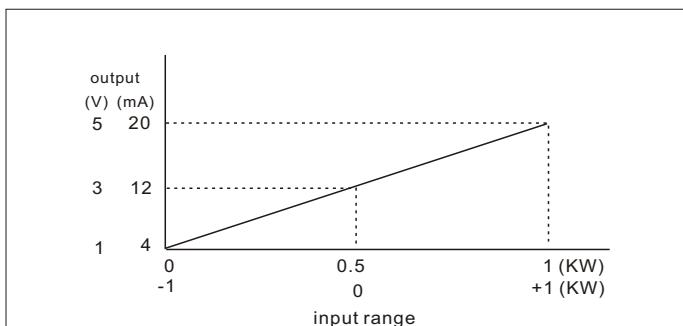

• OUTPUT

DC Output Range	Load Resistance	Output Resistance	Output Ripple	Response Time					
0 ~ 1V	$\geq 1K\Omega$	$\leq 0.05\Omega$	$\leq 0.5\% \text{ RO. (Peak)}$	$\leq 400\text{mS.}$ $0 \sim 99\%$					
0 ~ 5V									
1 ~ 5V									
0 ~ 10V									
0 ~ 1mA	$0 \sim 10K\Omega$	$\geq 20M\Omega$	$\geq 5M\Omega$	$\leq 400\text{mS.}$ $0 \sim 99\%$					
0 ~ 10mA	$0 \sim 1K\Omega$	$0 \sim 500\Omega$							
0 ~ 20mA	$0 \sim 500\Omega$								
4 ~ 20mA									

Accuracy	$\pm 0.2\%$ Rated of Output
Input frequency	50HZ $\pm 3\text{Hz}$ or 60HZ $\pm 3\text{Hz}$
Input burden	$\leq 0.1\text{VA}$ (ampere input) $\leq 0.2\text{VA}$ (voltage input)
Aux. power supply	AC 110V $\pm 15\%$, 50/60HZ AC 220V $\pm 15\%$, 50/60HZ DC 24V, 48V, 110V, $\pm 15\%$,
Power effect	$\leq 0.1\% \text{ RO.}$
Power consumption	$\leq 4\text{VA}$, $\leq \text{DC } 3\text{W}$
Waveform effect	$\leq 0.2\% \text{ RO.}$ at distortion factor 15%
Output load effect	$\leq 0.05\% \text{ RO.}$
Electromagnetic balance effect	$\leq 0.1\% \text{ RO.}$
Mutual interference effect	$\leq 0.1\% \text{ RO.}$ between element
Magnetic field strength	$\leq 0.2\% \text{ RO.}$, 400A/M
Span adjustment range	$\geq 5\% \text{ RO.}$
Zero adjustment range	$\geq 1\% \text{ RO.}$
Operating temperature range	0 ~ 60°C
Storage temperature range	-10 ~ 70°C
Temperature coefficient	$\leq 100\text{PPM}$ from 0 to 60°C $\leq 60\text{PPM}$, 25°C $\pm 10\text{C}$
Max. relative humidity	95%
Isolation	Input/output/power/case
Insulation resistance	$\geq 100\text{M}\Omega$, DC 500V
Dielectric withstand voltage (IEC 414, 688, ANSI C37)	Between input/output/power/case
Impulse withstand test (IEC 255-4, ANSI C37 90a)	AC 2.6KV, 60HZ, 1 min. 5KV, 1.2 X 50 μs
Performance	Common mode & differential mode
Safety requirements	Designed to comply with IEC 688, IEC 414, BS5458

SPECIFICATION

• INPUT

Input Range				Max. Input Over Capability
Circuit	Amp.	Voltage	Basic Watt	
Single Phase	5A	110V (120V)	0 ~ 0.5KW	Ampere: 3 x rated continuous 10 x rated 10 sec. 50 x rated 1 sec.
		220V (240V)	0 ~ 1KW	
3-Phase 3-Wire	5A	110V (120V)	0 ~ 1KW	Voltage: 2 x rated continuous
		220V (240V)	0 ~ 2KW	
3-Phase 4-Wire	5A	190V/110V (208/120V)	0 ~ 1.5KW	
		380V/220V (416/240V)	0 ~ 3KW	



ACTIVE POWER(WATT) TRANSDUCER


S3-WD
SERIES

ORDERING INFORMATION


Model	S3-WD-1 S3-WD-3 S3-WD-3A	[] [] [] [] [] []
Input Current	S3-WD-1 for 1 ϕ 2W S3-WD-3 for 3 ϕ 3W S3-WD-3A for 3 ϕ 4W	
Input Voltage	5: 5A 0: Option	
Input Frequency	1: 110V (120V) 2: 220V (240V) 3: 190V/110V (208V/120V) 4: 380V/220V (416V/240V) 0: Option	
Output Range	V1: 0 ~ 1V (~ 1 ~ 0 ~ 1V) V2: 0 ~ 5V (~ 5 ~ 0 ~ 5V) V3: 1 ~ 5V (1 ~ 3 ~ 5V) V4: 0 ~ 10V (0 ~ 5 ~ 10V) A1: 0 ~ 1mA (-1 ~ 0 ~ 1mA) A2: 0 ~ 10mA (-10 ~ 0 ~ 10mA) A3: 0 ~ 20mA (0 ~ 10 ~ 20mA) A4: 4 ~ 20mA (4 ~ 12 ~ 20mA) 00: Option	
Aux. Power Supply	A: AC 110V B: AC 220V 0: Option	C: DC 24V D: DC 48V E: DC 110V
Reverse Required	Y: Yes N: No	

*Remark: The value in parentheses is the output or reverse Watt be required

THE OUTSIDE DIMENSION (UNIT:mm)

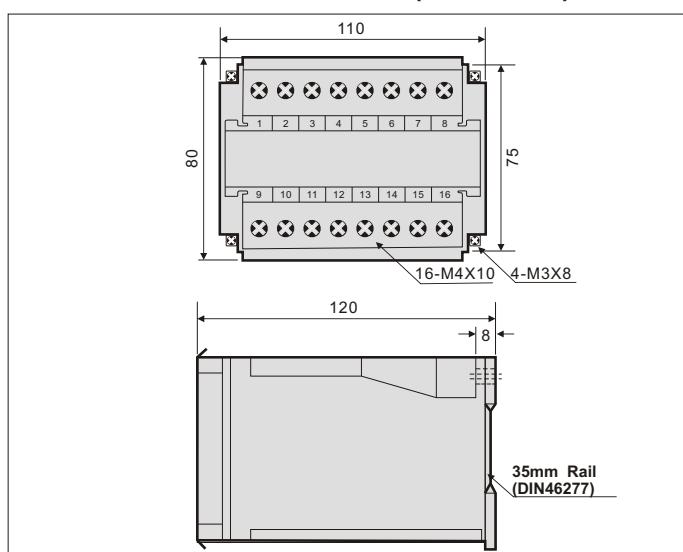


• PANEL MOUNTING HOLES (UNIT:mm)

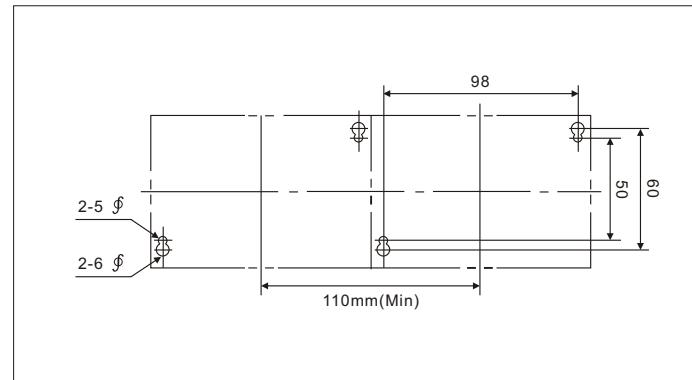


CONNECTION DIAGRAM

S3-WD-1 (1 ϕ 2W)

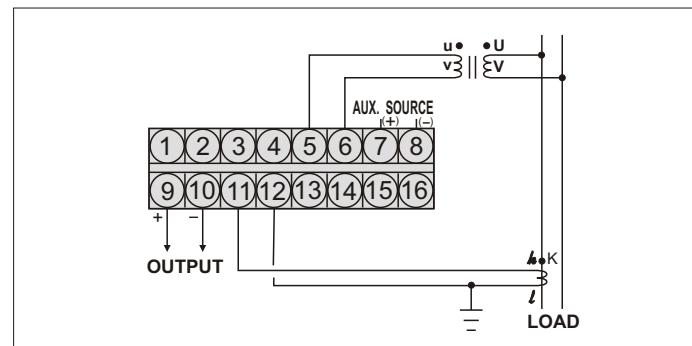

S3-WD-3 (3 ϕ 3W)

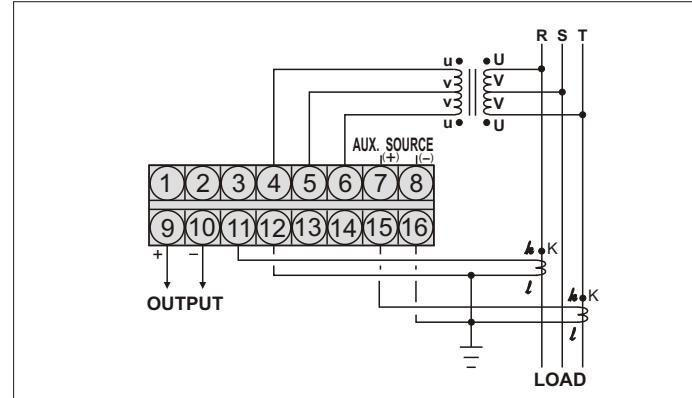

S3-WD-3A (3 ϕ 4W)

